Louzir, et al. PF030029 System for receiving broadcast digital data comprising a master digital terminal, and at least one

## 1/7



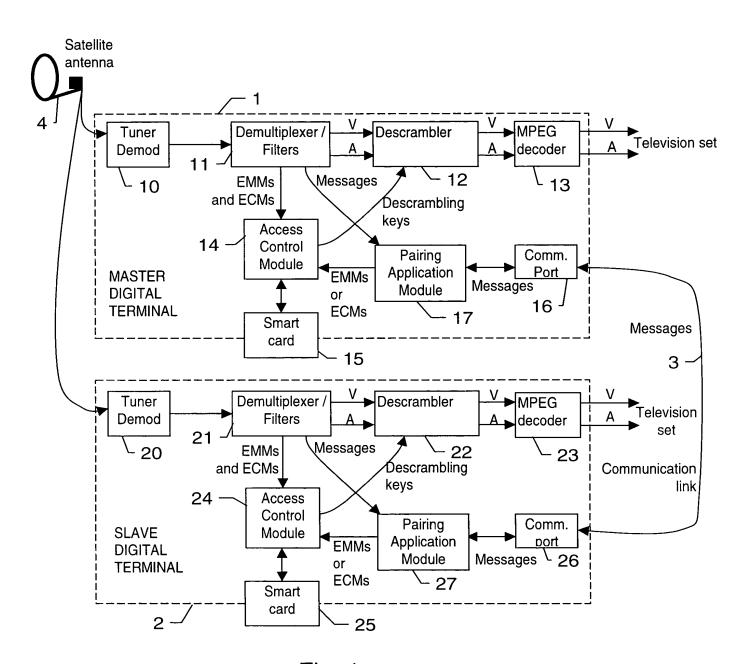



Fig. 1

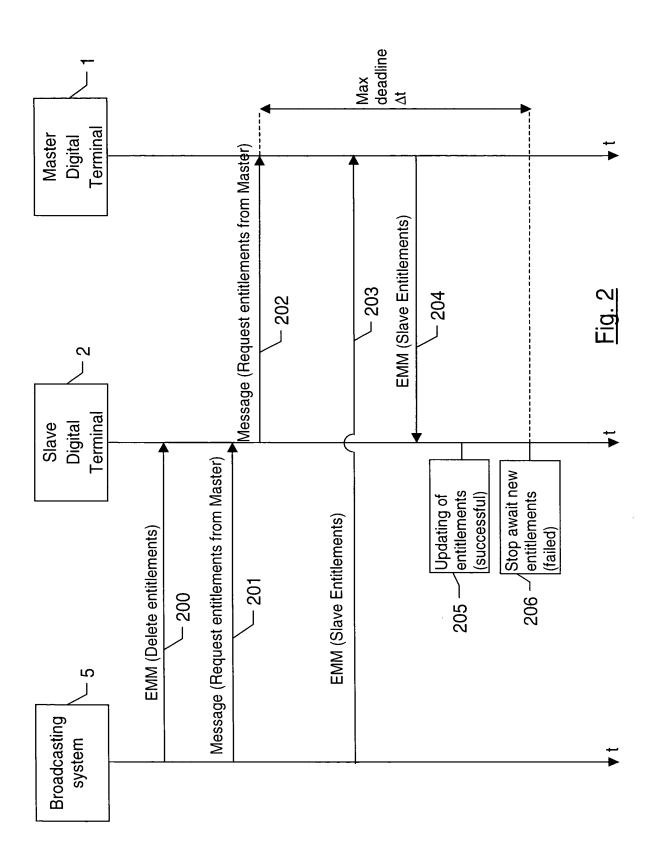



Louzir, et al.
PF030029
System for receiving broadcast digital data comprising a master digital terminal, and at least one 3/7

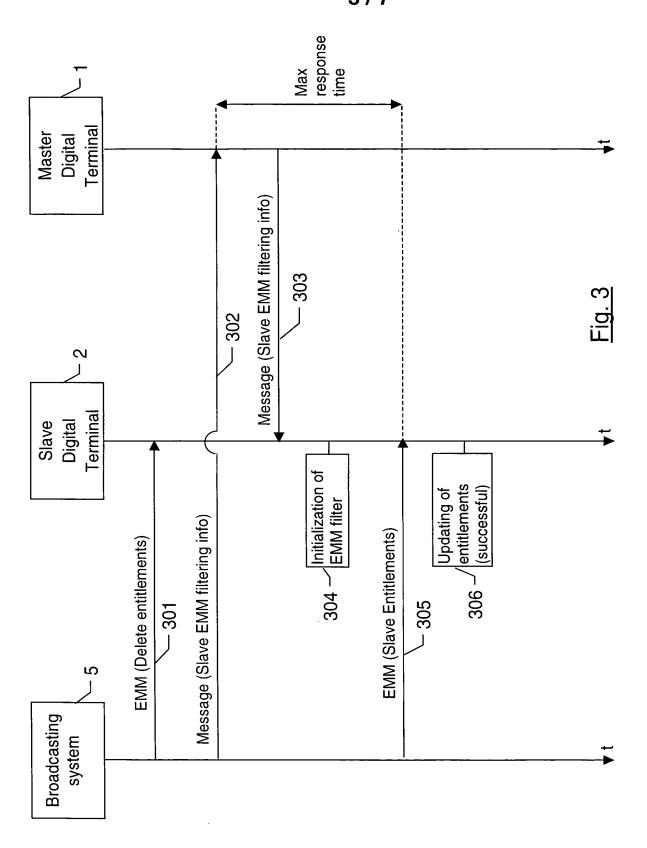

Louzir, et al.
PF030029
System for receiving broadcast digital data comprising a master digital terminal, and at least one
4/7

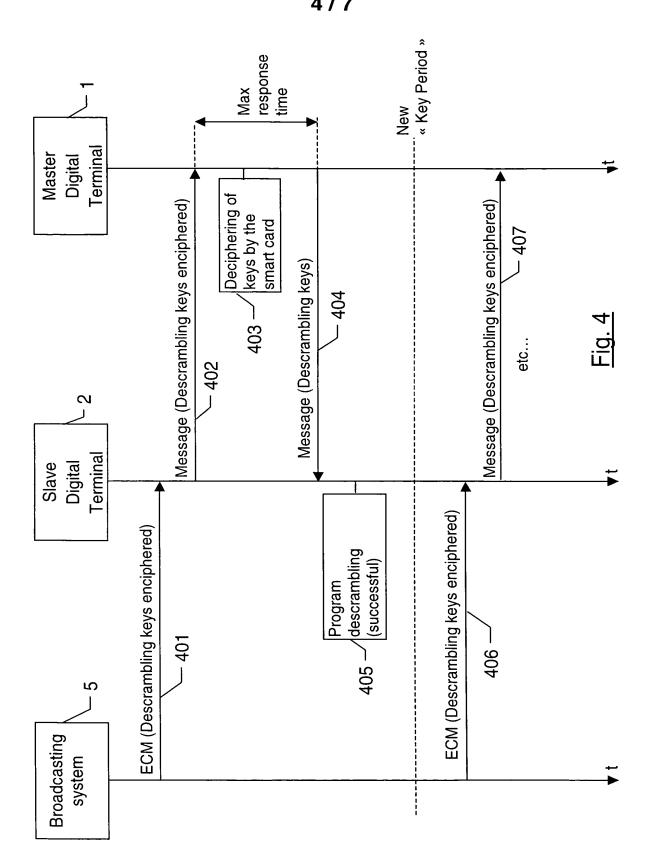

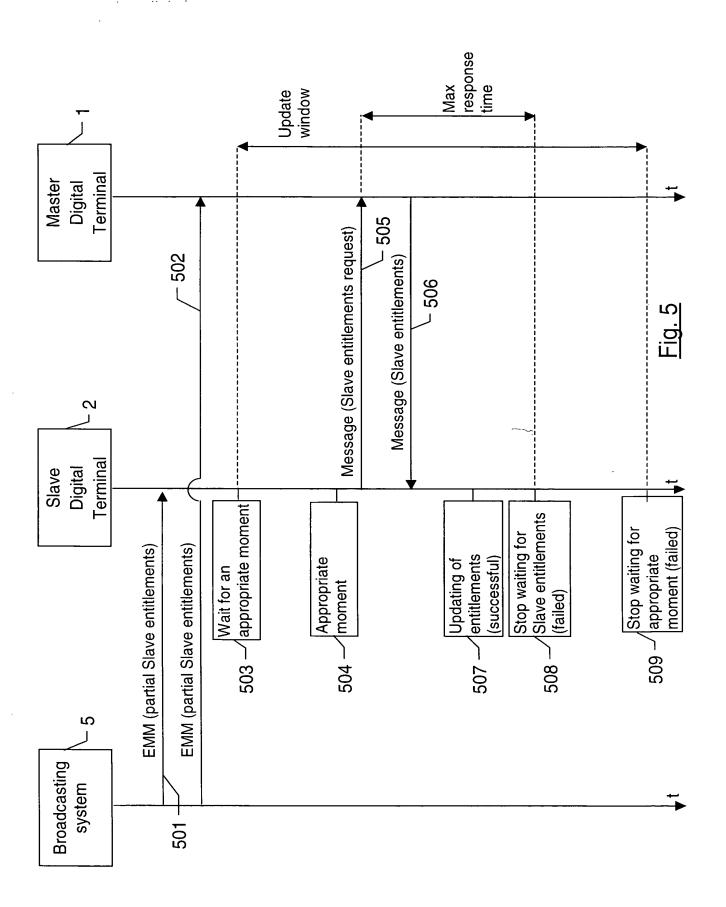

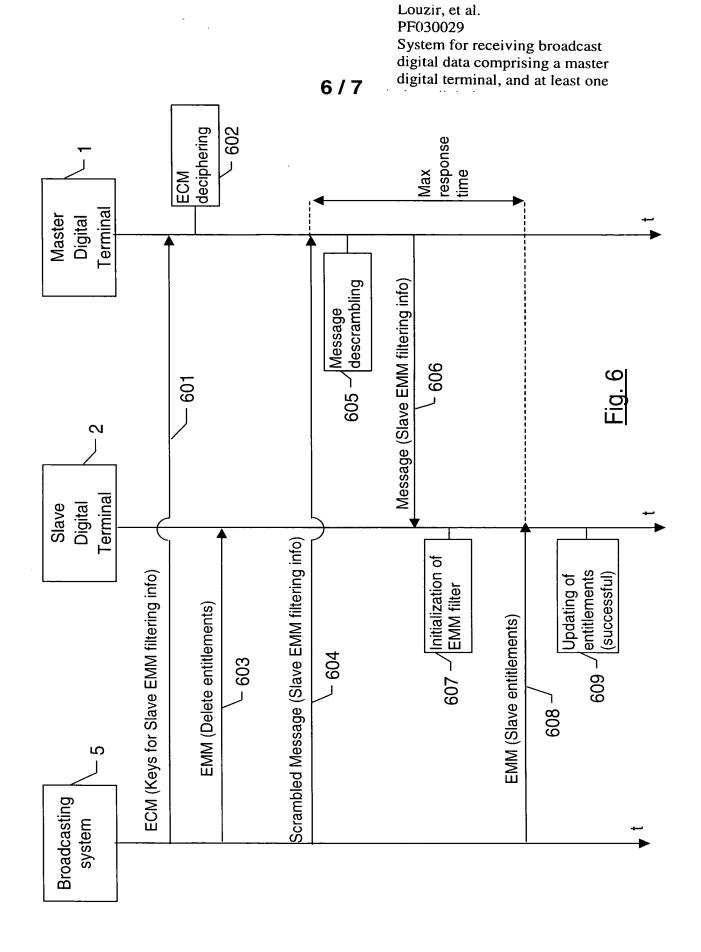

digital data comprising a master digital terminal, and at least one 7/7 response time of Master time of Slave *−* 706 ECM deciphering Мах response Max Terminal Master Digital 715 /secret code (failed) Stop waiting for 710 Secret code descrambling Message (Slave entitlements) Verification of secret code Message (Secret code) Fig. ECM deciphering  $^{\circ}$ Terminal Slave Digital slave entitlements Stop waiting for Message (scrambled secret code) Message (scrambled secret code) EMM (partial Slave entitlements) descrambling EMM (partial Slave entitlements) Secret code entitlements (successful) Updating of ECM (Keys for secret code) ECM (Keys for secret code) 702 (failed) 716 S 708 Broadcasting system 703 704 701 707

Louzir, et al. PF030029

System for receiving broadcast